

LCA-165 Series Accelerometer

**Proven History of Successful
Railway Applications and
Highest Repeatability Sensor
of its Class in the World.**

The Jewell **LCA-165 Series** accelerometers are configured specifically to yield a combination of high accuracy and ruggedness in railway applications. The Jewell LCA-165-R Series is the highest repeatability sensor of its class in the world today.

Features


- $\pm 0.5g$ to $\pm 2.0g$ Full Range
- Filtering Available
- Exceptional Bias
- High Level $\pm V_{dc}$ Output
- 100g Shock Capability

Applications

- Rail Monitoring and Testing
- Automated Train Controls
- Acceleration/Deceleration Control



Outline Diagram

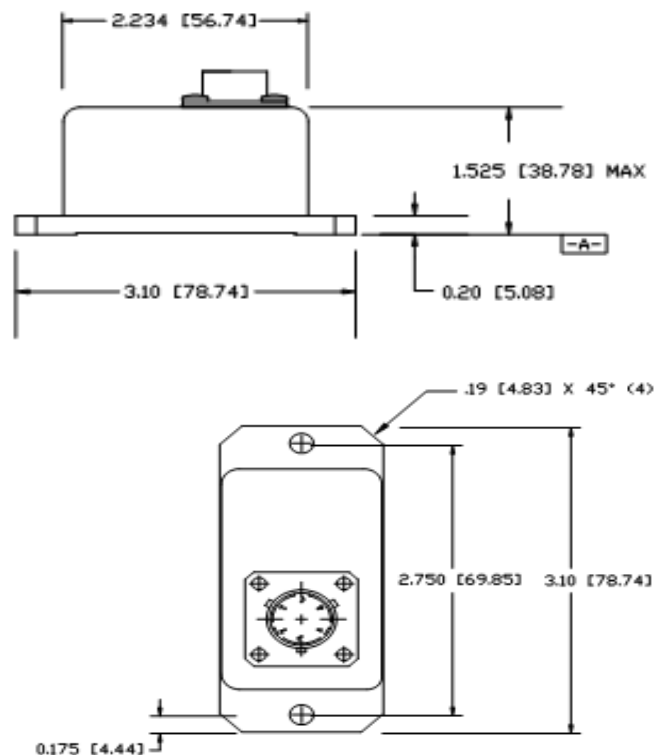

Pin Out (Options: C-connector, P-Pin)

CONNECTOR PIN	FUNCTION
A	+15 Vdc
B	P/S COM
C	-15 Vdc
D	Eo (volts/g)
E	N/C
F	N/C

Performance Specifications

STATIC/DYNAMIC

Input Range, g:	±0.5	±1.0	±5.0
Full Range Output (FRO -Note 1) VDC ±0.5%:	±5.00	±5.00	±5.00
Scale Factor, Volts/g, nominal:	10	5	1
Scale Factor Temp. Sensitivity (SFTS), PPM /°C maximum:	180	180	180
Natural Frequency, Hz nominal (Note 3):	60.00	60.00	60.00
Output Axis Misalignment, ° maximum:	1.0	1.0	1.0
Pendulous Axis Misalignment, ° maximum:	1.00	1.00	1.00
Bias, g range:	±0.01	±0.01	±0.01
Bias Temperature Sensitivity, µg /°C maximum:	100	100	100
Resolution and Threshold, µg maximum:	10.0	10.0	10.0

ELECTRICAL

ENCLOSURE

Number of Axes:	1	Seal:	MIL-STD-202, Mtd. 112
Input Voltage Range, (VDC):	±12 to ±18		
Input Current, mA, max:	25		
Output Impedance, Ohms, nom:	100		
Noise, grms, maximum:	0.005		

ENVIRONMENTAL

Operating Temp Range:	-55°C to +85°C
Storage Temp Range:	-60°C to +90°C
Vibration grms:	0
Shock:	100 g, 0.011 sec, ½ sine

Notes:

Note 1: Full Range is defined "from negative full input acceleration to positive full input acceleration."

Note 2: Nonlinearity is specified as deviation of output referenced to theoretical sine function value, independent of misalignment.

Note 3: Output Phase angle = - 90°.

Note 2: Nonlinearity is specified as deviation of output referenced to theoretical sine function value, independent of misalignment.

Note 3: Output Phase angle = - 90°.

How to Order

LCA-165-0.5g	451165-003
LCA-165-1g	451165-005
LCA-165-5g	451165-004