

1. OPERATING TEMPERATURE: -55°C TO +125°C




3. IA = SENSITIVE (INPUT) AXIS
OA = OUTPUT (HINGE) AXIS
PA = PENDULOUS AXIS

5. WEIGHT (GRAMS): 55 NOM.

6. UNITS: $\frac{[mm]}{Inch}$



SCALE 1:1

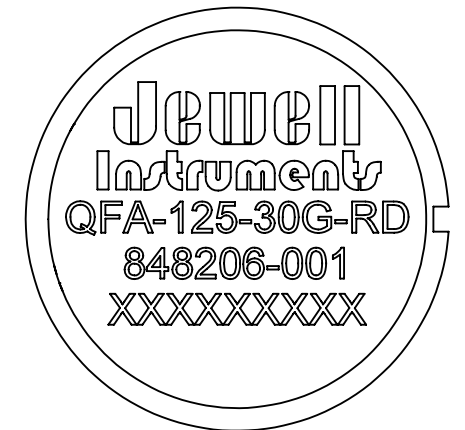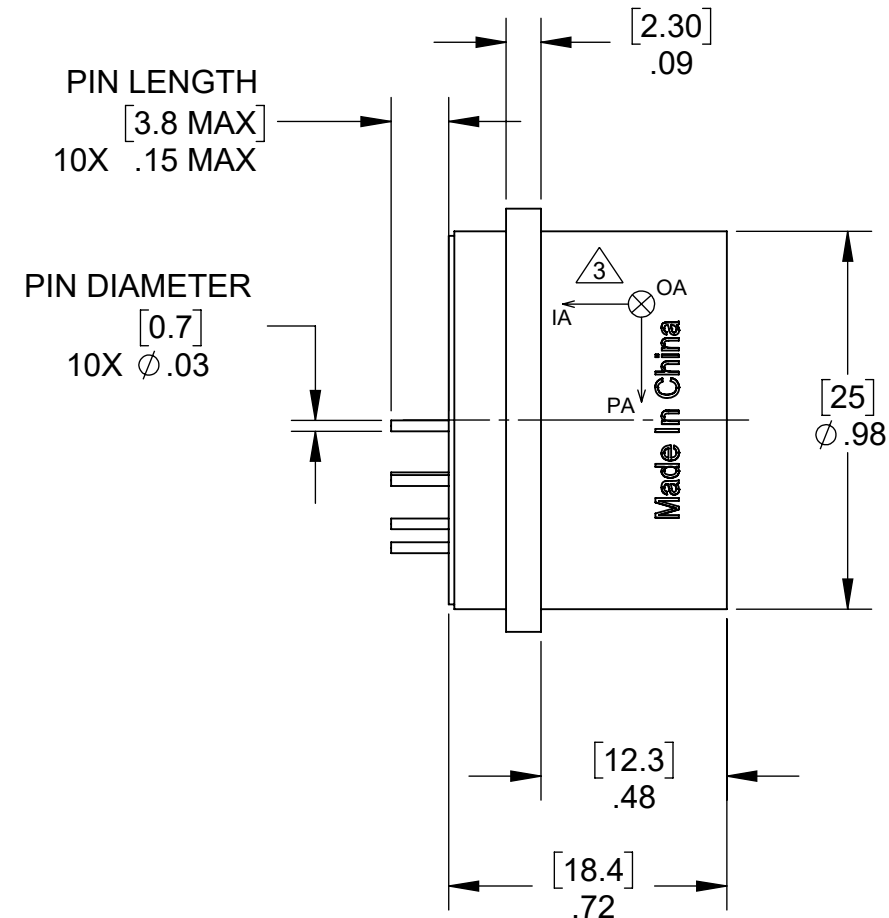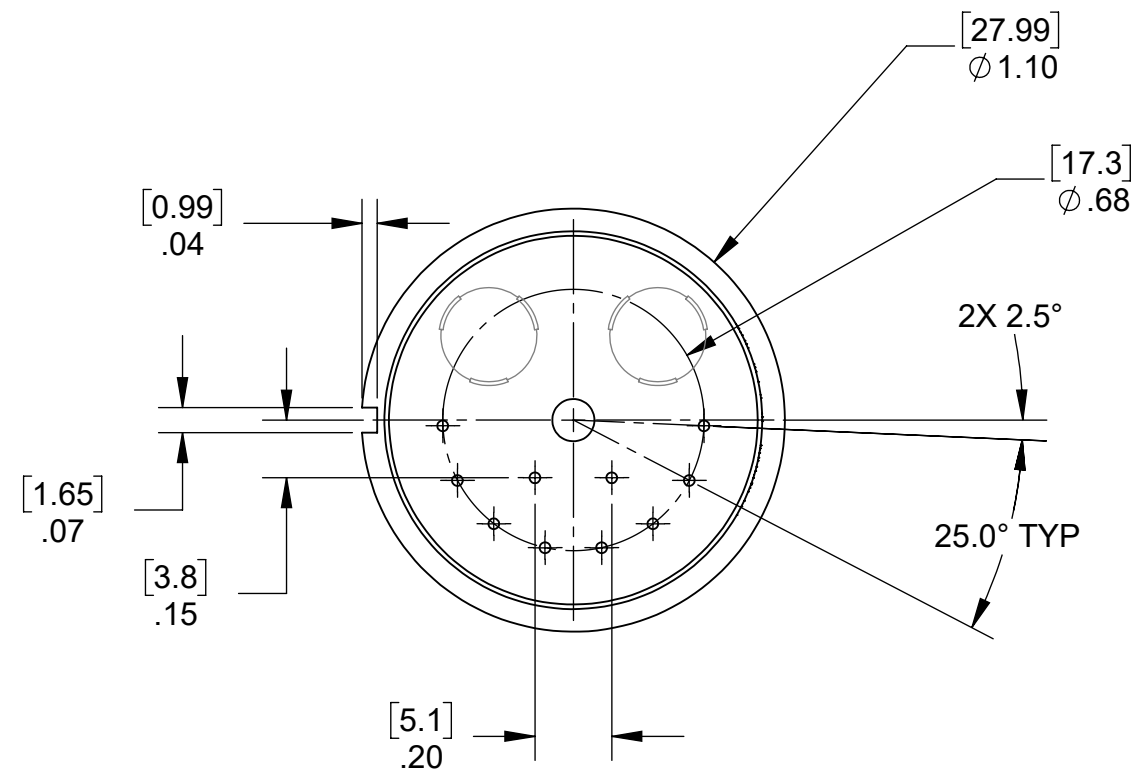

PIN ASSIGNMENT	
PIN	DESCRIPTION
1	CURRENT OUTPUT (SIGNAL OUT)
2	FACTORY USE
3	-15 VDC
4	+15 VDC
5	FACTORY USE
6	TEMPERATURE SENSE OUTPUT (1uA/K)
7	FACTORY USE
8	SIGNAL & POWER RETURN
9	FACTORY USE
10	FACTORY USE

APPLICATION		DIMENSIONS ARE IN INCHES AND APPLY TO PART BEFORE FINISHING		 MANCHESTER, NH TRIPLETT MODUTEC A&M EMICO	TITLE			QFA-125-30G-RD OUTLINE DRAWING		
USED ON	NEXT ASSY	TOLERANCE UNLESS SPECIFIED			DRAWING NO.					REV
		TWO PLACE DECIMALS (.00) ± .01 THREE PLACE DECIMALS (.000) ± .005 ANGLES ± 1° RAW MATL - COMMERCIAL STANDARD			OD848206-001					E
MATERIAL					PROPRIETARY NOTICE THIS DRAWING IS THE PROPERTY OF JEWELL INSTRUMENTS, LLC. NEITHER THIS DOCUMENT NOR THE DATA CONTAINED HEREIN SHALL BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART WITHOUT THE WRITTEN AUTHORIZATION OF JEWELL INSTRUMENTS, LLC. NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED HEREIN. ALL RIGHTS RESERVED.					
FINISH										
NA				SCALE	CAGE CODE	SHEET 1 OF 1				
NA				2:1	33005					